Stowe Model 8325

The Stowe is compact, easy to use, and reliable addition to your living space.



Features

Enameled cast iron

The small size and beautiful style of this cast iron stove inspired us to offer it in our unique oyster enamel, as well as our classic brown enamel and matte black.

Easy to use

The Stowe 8325 maintains a standing pilot which will shut off after 7 days of inactivity. It can be run manually, with a standard or programmable thermostat, or with an optional remote control.


Efficiency you can feel

In addition to burning cleanly, the Stowe uses a cast iron heat exchanger to move the heat from the fire into your home, not up the chimney.





Dimensions

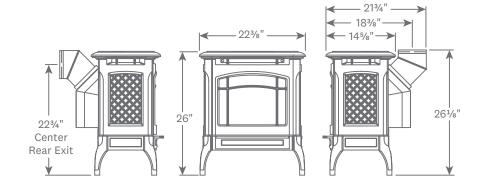

Clearances



4"

3"

4"*

*6" with side walls deeper than 18"

Floor Protection:

Non-combustible surface or wood floor

Side Rear Corner

Finish Options





Matte Black

Specifications

Heats up to	.1,200 sq ft
Steady State Efficiency	.80.1%
P.4.1.09 Efficiency	.75.7%
Burn Rate Range NG	.15k-22.4k BTUs/hr
Burn Rate Range LP	.15k-22.4k BTUs/hr
Venting	.45°, 4" x 6-5/8" DV
Ignition System	.SIT 820, 7 day timeout
Burner	.Ceramic Burner
Convection Blower	.Optional
Remote Control	.Optional
Safety Barrier Screens	.Included
LP Conversion Kit	.Included
Mobile Home Certified	.Yes
Weight	.155 lbs.

Accessories

Convection Blower	93-57230
Remote Control Kit	90-56914

Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.